


## VPN Einwahl mit macOS und FreeOTP

Öffnen von PulseSecure Client

Neue Verbindung

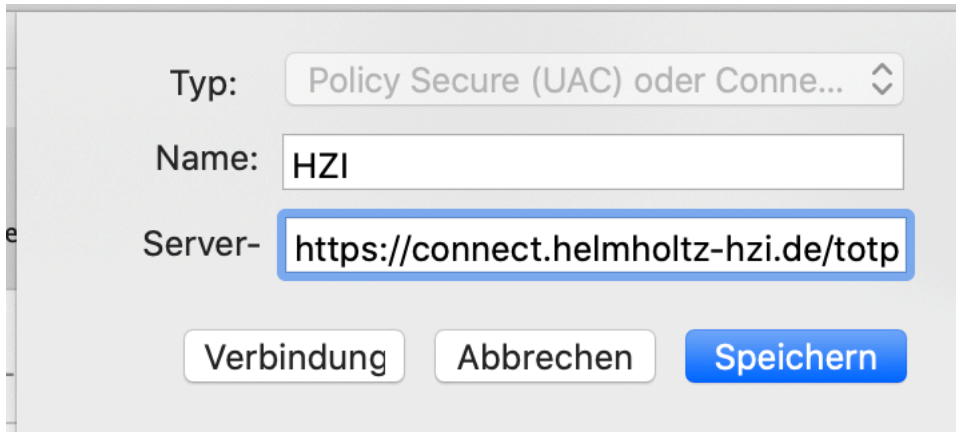

The screenshot shows a macOS dialog box for creating a new connection. It has three input fields: 'Typ' (Type) with a dropdown menu showing 'Policy Secure (UAC) oder Conne...', 'Name' with the text 'HZI', and 'Server-' with the URL 'https://connect.helmholtz-hzi.de/totp'. At the bottom, there are three buttons: 'Verbindung' (disabled), 'Abbrechen' (disabled), and 'Speichern' (Save).


Typ: Policy Secure (UAC) oder Conne... ▾

Name: HZI


Server- https://connect.helmholtz-hzi.de/totp

Verbindung Abbrechen Speichern

Verbindung herstellen

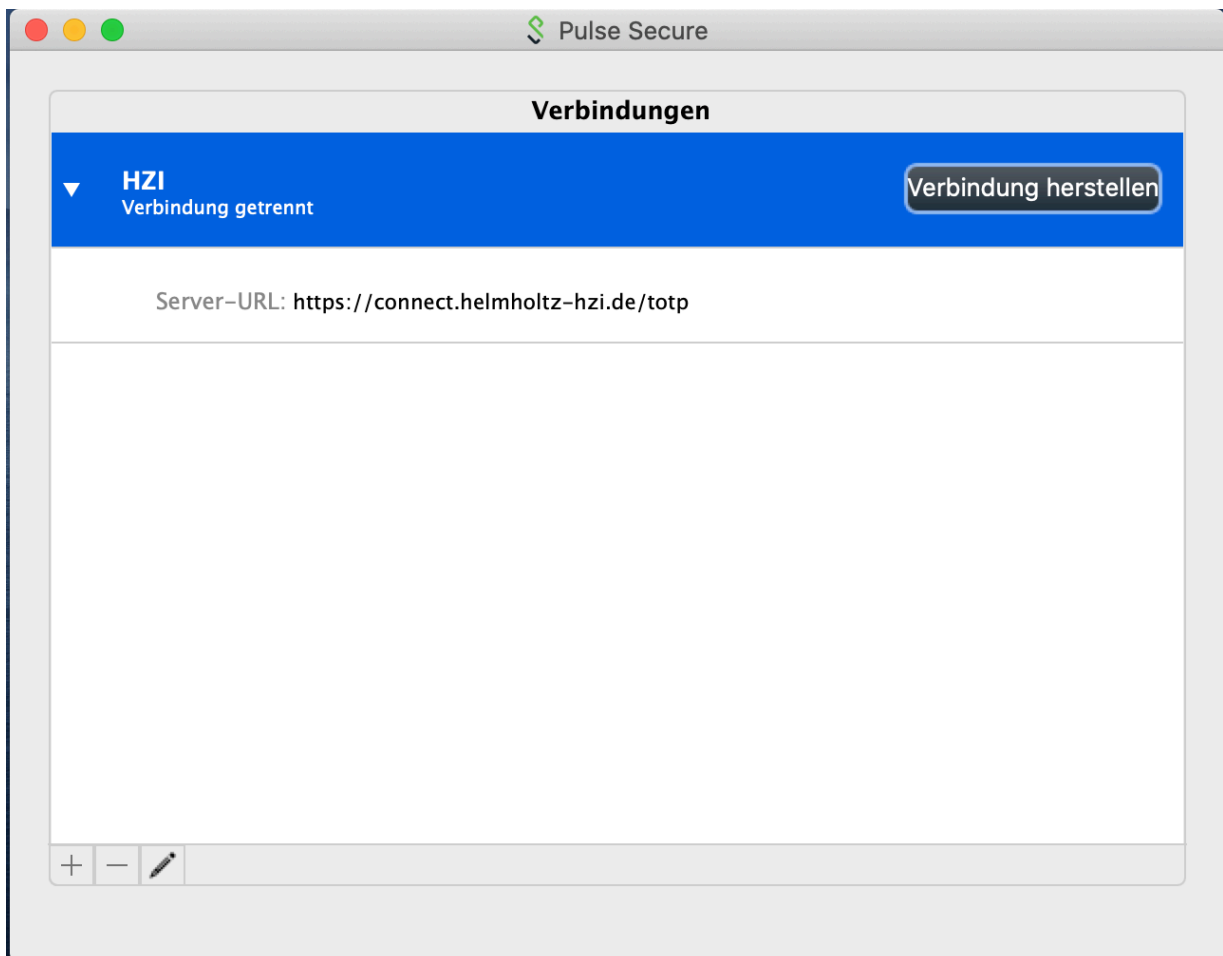

## Eingabe von AD User Credentials

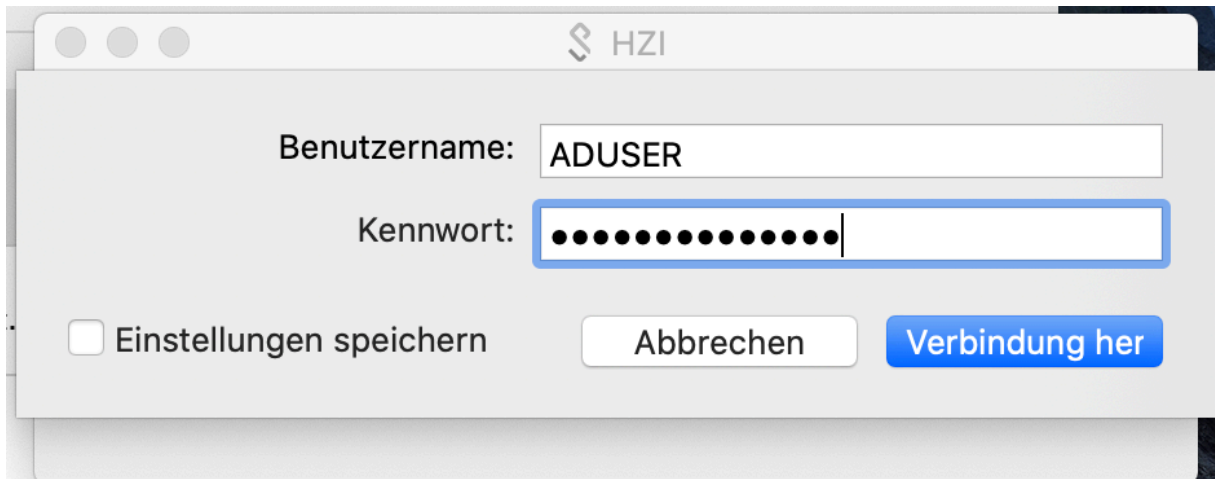

A macOS-style login dialog box titled "HZI" with a green logo. It contains two text input fields: "Benutzername:" with the value "ADUSER" and "Kennwort:" with masked characters. Below the password field is a checkbox labeled "Einstellungen speichern". At the bottom are two buttons: "Abbrechen" and "Verbindung her".


Benutzername: ADUSER

Kennwort: [Masked Password]

☐ Einstellungen speichern

Abbrechen Verbindung her

## Eingabe von FreeOTP Code

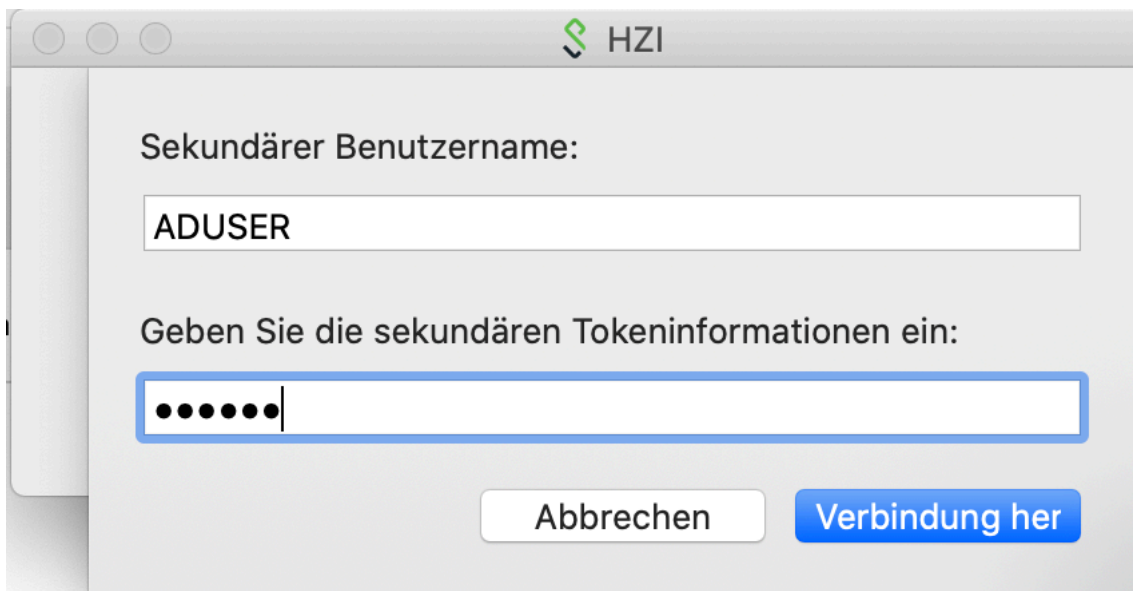

A macOS-style login dialog box titled "HZI" with a green logo. It contains a text input field labeled "Sekundärer Benutzername:" with the value "ADUSER". Below it is a label "Geben Sie die sekundären Tokeninformationen ein:" followed by a text input field with masked characters. At the bottom are two buttons: "Abbrechen" and "Verbindung her".

Sekundärer Benutzername:

ADUSER

Geben Sie die sekundären Tokeninformationen ein:

[Masked Code]

Abbrechen Verbindung her